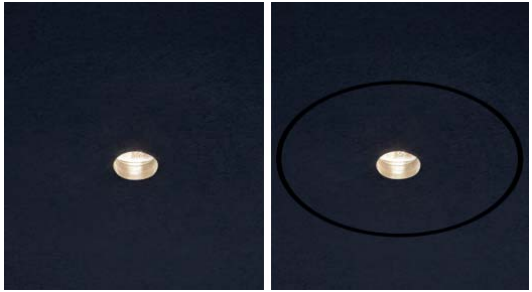





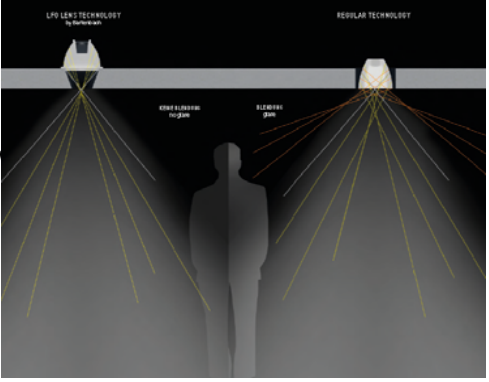


## Blindspot Trimless

	<p>  12,5 - 32mm   68 mm, ET 100mm   </p> 	
<p><b>IMAGE</b></p>	<p><b>DIMENSIONS:</b> As Detailed only 10mm optic</p>	

<p><b>LUMINAIRE DESCRIPTION</b></p>	<p>Ultra Small Trim less 10mm Recessed Downlight, supplied with plasterboard retention ring system. Utilising latest Bartenbach LFO lens technology to mitigate glare achieving a class leading UGR of less than 13</p>	<p><b>TECHNICAL INFORMATION</b></p>	<p>9W 430LM 3000K AVAILABLE LED OPTIC 30 OR 55 DEGREE NO GLARE TECH</p> 	<p><b>WATTAGE</b></p> <p>9W</p> <p><b>LUMINOUS EFFICACY (LUMINAIRE)</b></p> <p>48LM/W</p> <p><b>RA (CRI)</b></p> <p>90</p> <p><b>CCT MACADAM STEPS</b></p> <p>3</p>	
<p><b>ORDER CODES</b></p>	<p>TBC</p>	<p><b>FINISH</b></p>	<p>PLASTER – SURFACE OF FITTING CAN BE PAINTED (TRIMLESS)</p>	<p><b>IP RATING</b></p>	<p>IP20</p>
<p><b>EMERGENCY (Y/N)</b></p>	<p>YES REMOTE, UPTO 5M FROM FITTING USING 1.5MM CSA Cabling</p>	<p><b>DIMMING PROTOCOL</b></p>	<p>MAINS / DALI &amp; 0-10V</p>	<p><b>ELECTRICAL SPECIFICATION</b></p>	<p>240V</p>