
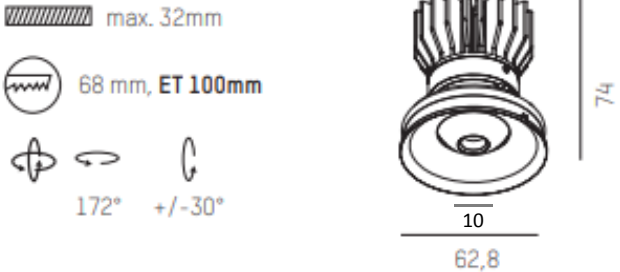
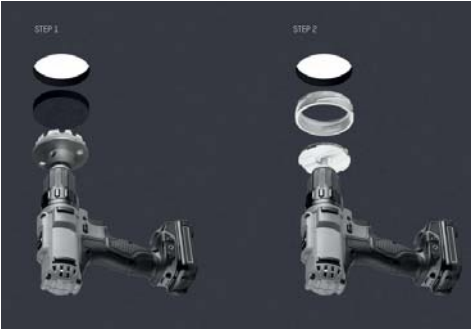


Blindspot Trimmed - Adjustable

		
<p>IMAGE</p>	<p>DIMENSIONS: As Detailed above with 10mm optic</p>	

<p>LUMINAIRE DESCRIPTION</p>	<p>Ultra Small Trimmed adjustable Recessed Downlight, supplied with plasterboard retention ring system. Utilising latest Bartenbach LFO lens technology to mitigate glare achieving a class leading UGR of less than 13. Optic only 10mm dia.</p>	<p>TECHNICAL INFORMATION</p>	<p>9W 430LM 3000K AVAILABLE WITH A 30d OR 55d OPTIC LED</p>	<p>WATTAGE</p>	
				<p>9W</p>	
				<p>LUMINOUS EFFICACY (LUMINAIRE)</p>	
				<p>48LM/W</p>	
				<p>RA (CRI)</p>	
<p>90</p>					
<p>CCT MACADAM STEPS</p>					
<p>3</p>					
<p>ORDER CODES</p>	<p>TBC</p>	<p>FINISH</p>	<p>BLACK / WHITE / RAL COLOURS</p>	<p>IP RATING</p>	<p>IP20</p>
<p>EMERGENCY (Y/N)</p>	<p>YES REMOTE, UPTO 5M FROM FITTING USING 1.5MM CSA Cabling</p>	<p>DIMMING PROTOCOL</p>	<p>MAINS / DALI & 0-10V</p>	<p>ELECTRICAL SPECIFICATION</p>	<p>240V</p>